




# Sony Vaio SVE111B11L Keyboard Assembly Replacement

Replacing a melted, worn or broken keys or keyboard assembly.

Written By: John Noll

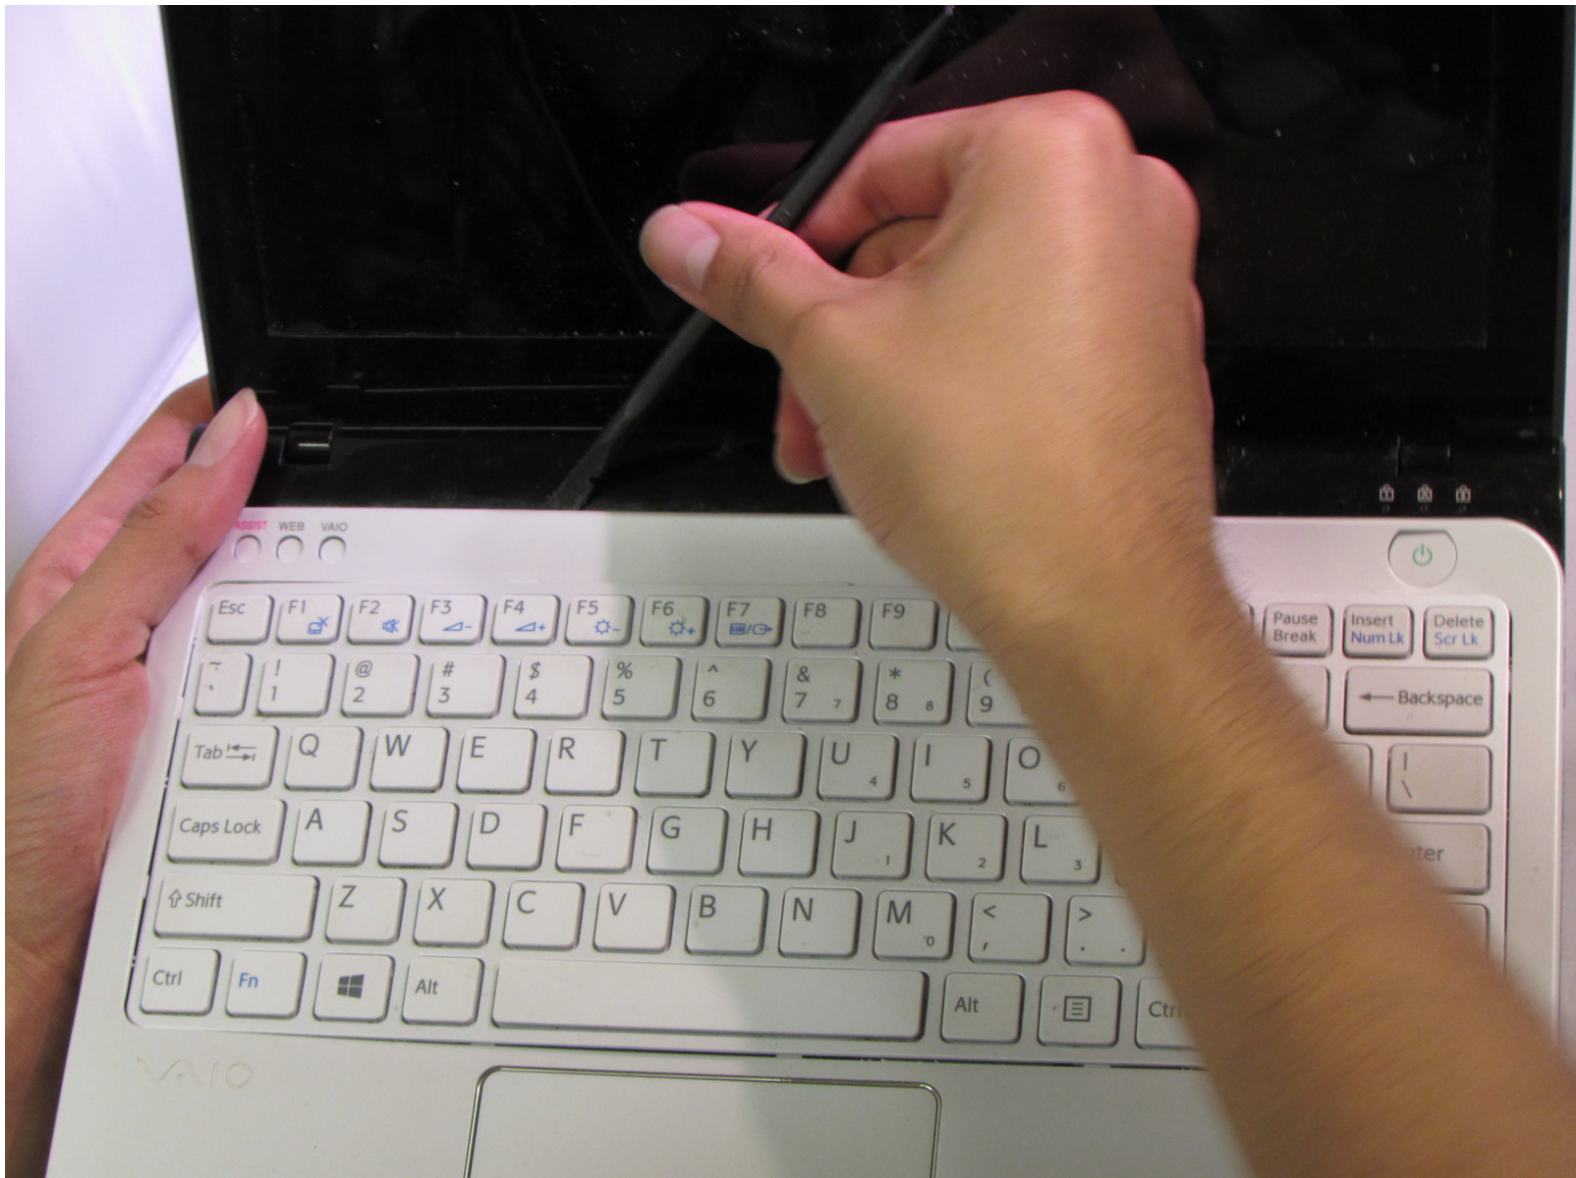



## TOOLS:

- [Phillips #0 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Battery



⚠ Remove charging adaptor. Some charge may still be in the battery or computer. DO NOT touch connectors or copper yellow connector.

- Locating the Battery
- Flip Computer Toward Yourself

## Step 2



- Releasing Battery
- Locate two switches with the word “lock” and “release” on them.




## Step 3




- Removing Battery
- Push towards each other while simultaneously lifting up the battery in between the two switches.

## Step 4 — Keyboard Assembly

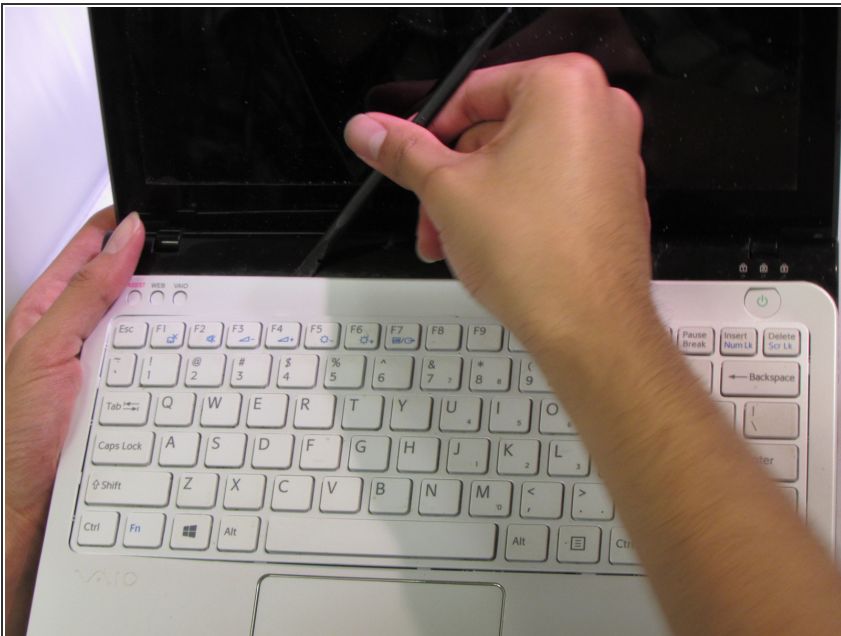

- ⚠ Remove charging adaptor. Some charge may still be in the battery or computer.
- ⚠ DO NOT touch connectors or copper yellow connector.
- The key board is attached by a screw on the back.
- The front cover also holds the keyboard assembly.
- Remove the memory door to access the screw for the keyboard.
- ⓘ The screws for the memory door do not come out. they are held from falling out.

## Step 5

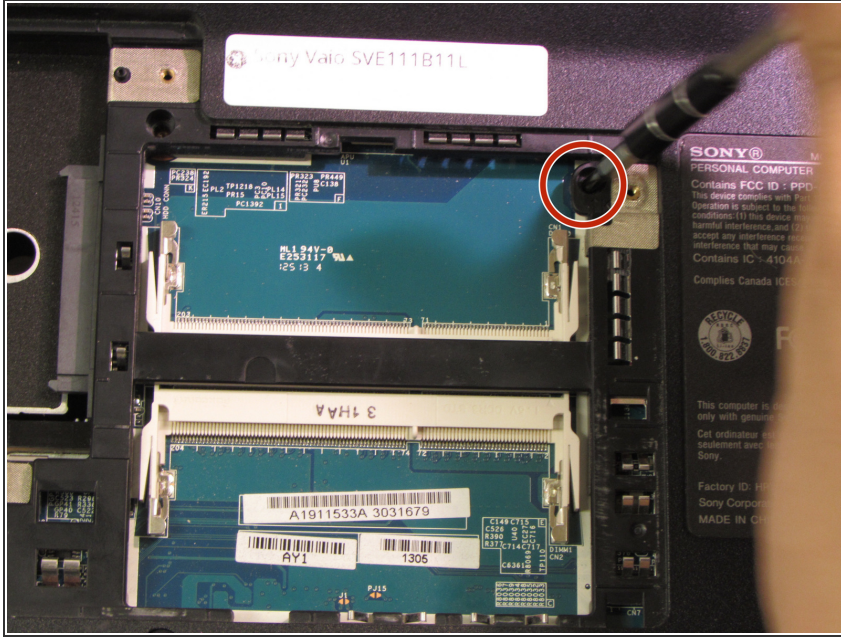


- Locate the screw that holds the keyboard assembly in place.
- Remove this screw.
- Size: L 6.7mm X D 1.9mm

## Step 6



- ⓘ Be careful of the keyboard wire connection.
- ⓘ Making sure that you when you slide the wires out. You slide from the side opposite the solder connections.
- Flip computer over and open.

## Step 7

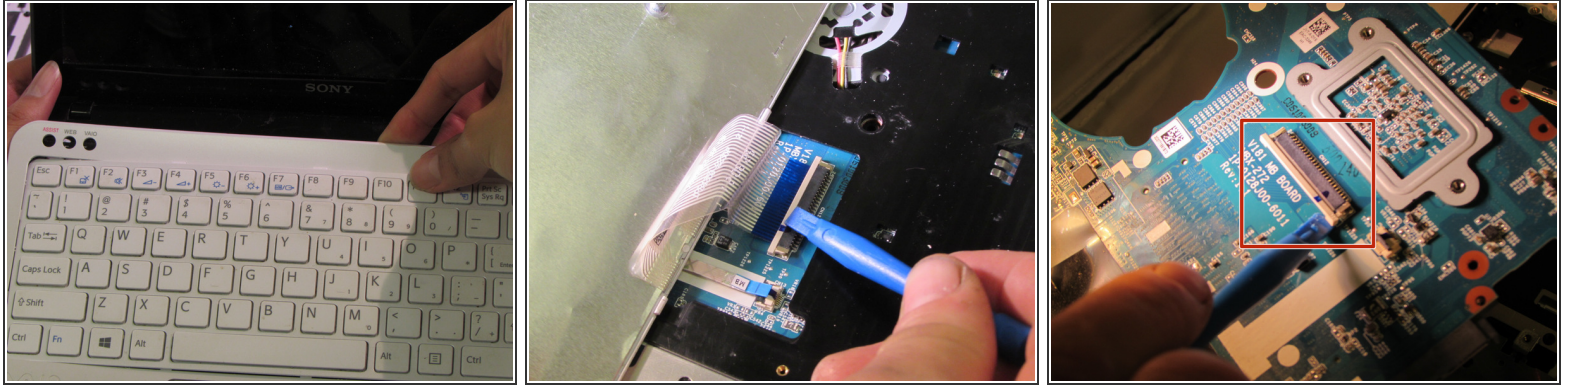

- Gently pry the keyboard assembly from the front. (closest to the screen) With the blue spudger.
- When the front of the keyboard is about two inches up. Carefully, using the blue spudger, pull out and slightly up on the connector clip. Then remove the wire connector.
- Gently lift the key board assembly up and out.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-07 07:39:48 PM.